

SERVICE & OFFICE DOOR ACCESSORIES



INOVA REFRIGERATION DOOR AND ACCESSORIES



Inova Group :







Since its inception, it has Reached More Than 10,000 Customers Worldwide & We Manufactured Than More 80,000 Doors.

Our Production of Turkey :


Sliding Door With Personal Door , Folding Service Door , Double Wings of Sliding Door & With These Doors We Manufactured Hinged Door , Sliding Door ,FlipFlap Door ,Service Door & Monorail System INOVA GROUP Aims to Keep Customer Satisfaction at Maximum Level With its Quality & Service Import – Export – Production – Marketing - Sales & After - Sales Services Constitute Our Main Activity Structure .

IF YOU GIVE IMPORTANCE TO CUSTOMER YOU WILL BE THE MOST VALUABLE BRAND OF WORLD..

Inova Group Continues to Action With This Mission.

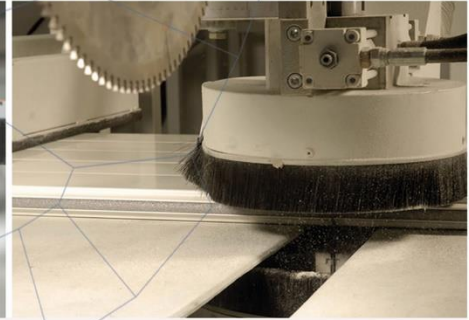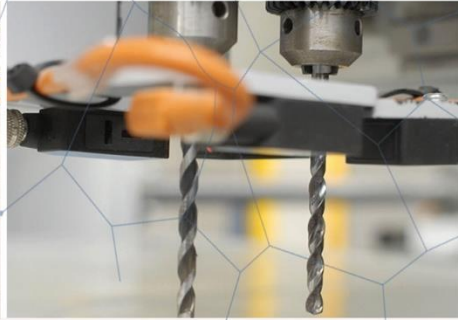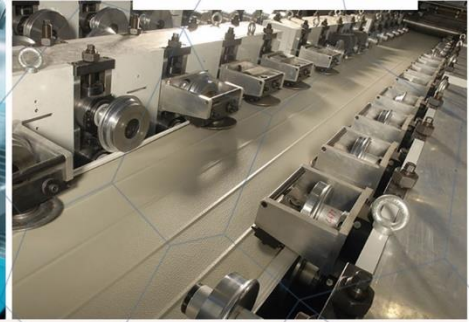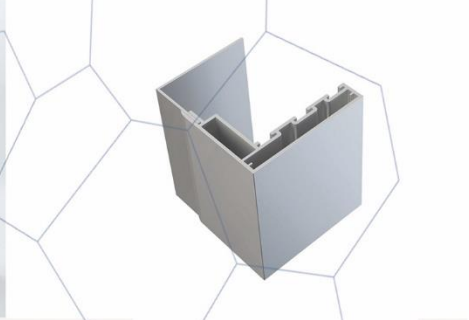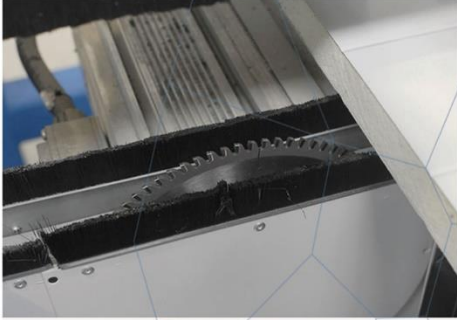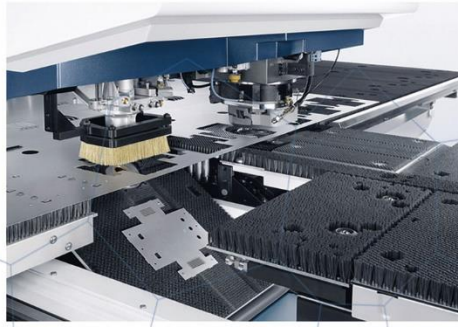


SERVICE & OFFICE DOOR ACCESSORIES

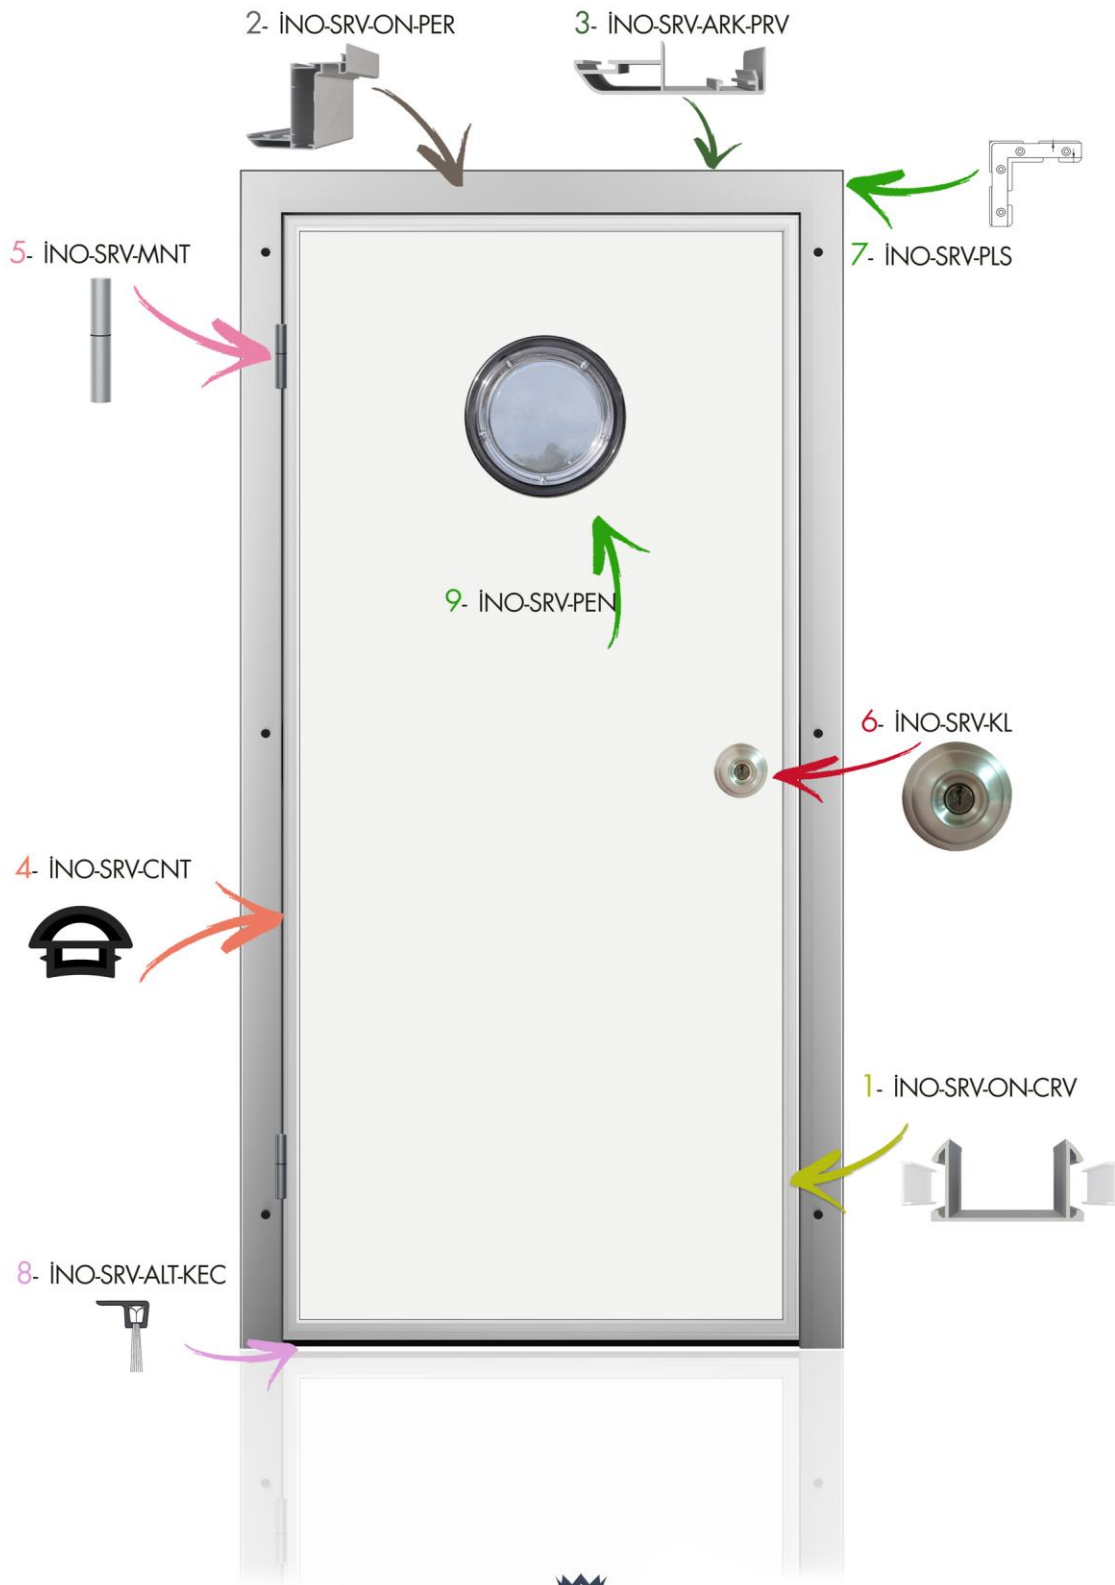

SERVICE & OFFICE DOOR ACCESSORIES

INO-SRV-ON-CRV

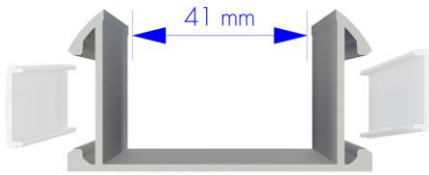

Service Door Case Around The Wings of Service Door DIN 50049-2.2./EN 10204-3.1.B. Standard Anodized Aluminum Profile We Use . (it's for 40 mm door thickness)

CHEMICAL COMPOSITION								
Fe (Iron)	Si (Silisium)	Cu (Copper)	Mn (Manganese)	Mg (Magnesium)	Zn (Zinc)	Ti (Titanium)	Cr (Chrome)	AL (Aluminium)
0,10-0,30	0,30-0,60	0,1	0,1	0,35-0,60	0,15	0,1	0,05	Remaining
0,17	0,42	0,01	0,03	0,47	0,01	0,01	0,01	98,8

MECHANICAL PROPERTIES			
Rupture Strength Rm (N/mm ²) min.215	Yield Strength Rp 0,2 (N/mm ²)min.170	Elongation A 50 mm (%)min.6	Brinel HB min.70
216	171	7	70

INO-SRV-ON-PER




Service door front frame . This frame is attached between the Wing & the unit to be installed. . Aluminium DIN 50049.2.2. / EN 10204-3.1.B Standard anodized coated aluminum .

CHEMICAL COMPOSITION								
Fe (Iron)	Si (Silisium)	Cu (Copper)	Mn (Manganese)	Mg (Magnesium)	Zn (Zinc)	Ti (Titanium)	Cr (Chrome)	AL (Aluminium)
0,10-0,30	0,30-0,60	0,1	0,1	0,35-0,60	0,15	0,1	0,05	Remaining
0,17	0,42	0,01	0,03	0,47	0,01	0,01	0,01	98,8

MECHANICAL PROPERTIES			
Rupture Strength Rm (N/mm ²) min.215	Yield Strength Rp 0,2 (N/mm ²)min.170	Elongation A 50 mm (%)min.6	Brinel HB min.70
216	171	7	70

INO-SRV-ARK-PRV

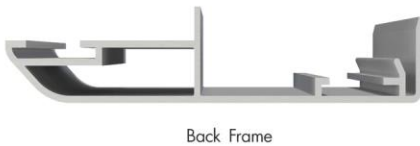

Service door back frame . This frame is attached between the Wing & the unit to be installed. . Aluminium DIN 50049.2.2. / EN 10204-3.1.B Standard anodized coated aluminum .

CHEMICAL COMPOSITION								
Fe (Iron)	Si (Silisium)	Cu (Copper)	Mn (Manganese)	Mg (Magnesium)	Zn (Zinc)	Ti (Titanium)	Cr (Chrome)	AL (Aluminium)
0,10-0,30	0,30-0,60	0,1	0,1	0,35-0,60	0,15	0,1	0,05	Remaining
0,17	0,42	0,01	0,03	0,47	0,01	0,01	0,01	98,8

MECHANICAL PROPERTIES			
Rupture Strength Rm (N/mm ²) min.215	Yield Strength Rp 0,2 (N/mm ²)min.170	Elongation A 50 mm (%)min.6	Brinel HB min.70
216	171	7	70

INO-SRV-CNT



Service Door Wing bottom Gasket used for insulation on the underside of the door Wing It is made of PVC rubber. it's in compliance with 21.CFR 177.2600 specifications & quality standards .



SERVICE & OFFICE DOOR ACCESSORIES

INO-SRV-MNT



Service Door Hinges We Use to connect between the door wing with the door Frame .Aluminium DIN 50049.2.2./EN 10204-3.1.B Standard anodized coated aluminum .

CHEMICAL COMPOSITION								
Fe (Iron)	Si (Silisum)	Cu (Copper)	Mn (Manganese)	Mg (Magnesium)	Zn (Zinc)	Ti (Titanium)	Cr (Chrome)	AL (Aluminum)
0,10-0,30	0,30-0,60	0,1	0,1	0,35-0,60	0,15	0,1	0,05	Remaining
0,17	0,42	0,01	0,03	0,47	0,01	0,01	0,01	98,8


MECHANICAL PROPERTIES			
Rupture Strength Rm (N/mm ²) min.215	Yield Strength Rp 0,2 (N/mm ²)min.170	Elongation A 50 mm (%)min.6	Brinel HB min.70
216	171	7	70

INO-SRV-KL



Service Stainless Door Lock Service Lock are applied on the door Wing . it can be installed Internal & external lock .X5CrNi18-10 - EN 1.4301 - Standards.

INO-SRV-PLS




Service Door Front / Back Farama Corner Plastic.

INO-SRV-ALT-KEC



Service Door Bottom.

INO-SRV-PEN

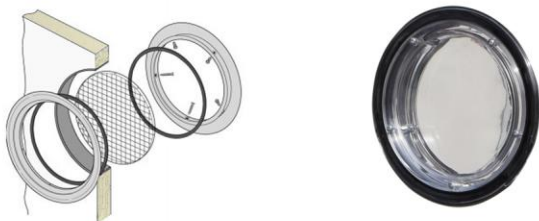

Service door Viewing Window .It is a system for seeing inside & outside .Made of fiberglass which production on hard & transparent material & Epdm flexible seals 100% leak proof.



inovarefrigeration



iNOVA YAPI LTD STi.

Mehmet Akif Cad.No:41 Kısıkköy-Menderes-İzmir / Turkey



Phone : 00 90 232 257 56 70
Fax : 00 90 232 257 52 60
Mobile : 00 90 530 948 42 35



www.inovayapi.com
info@inovayapi.com

inovarefrigeration
by INOVA YAPI