

ALUMINUM FRAME




COLD ROOM DOOR & ACCESSORIES
Hinged Doors



inovarefrigeration
by INOVA YAPI

INOVA REFRIGERATION DOOR AND ACCESSORIES

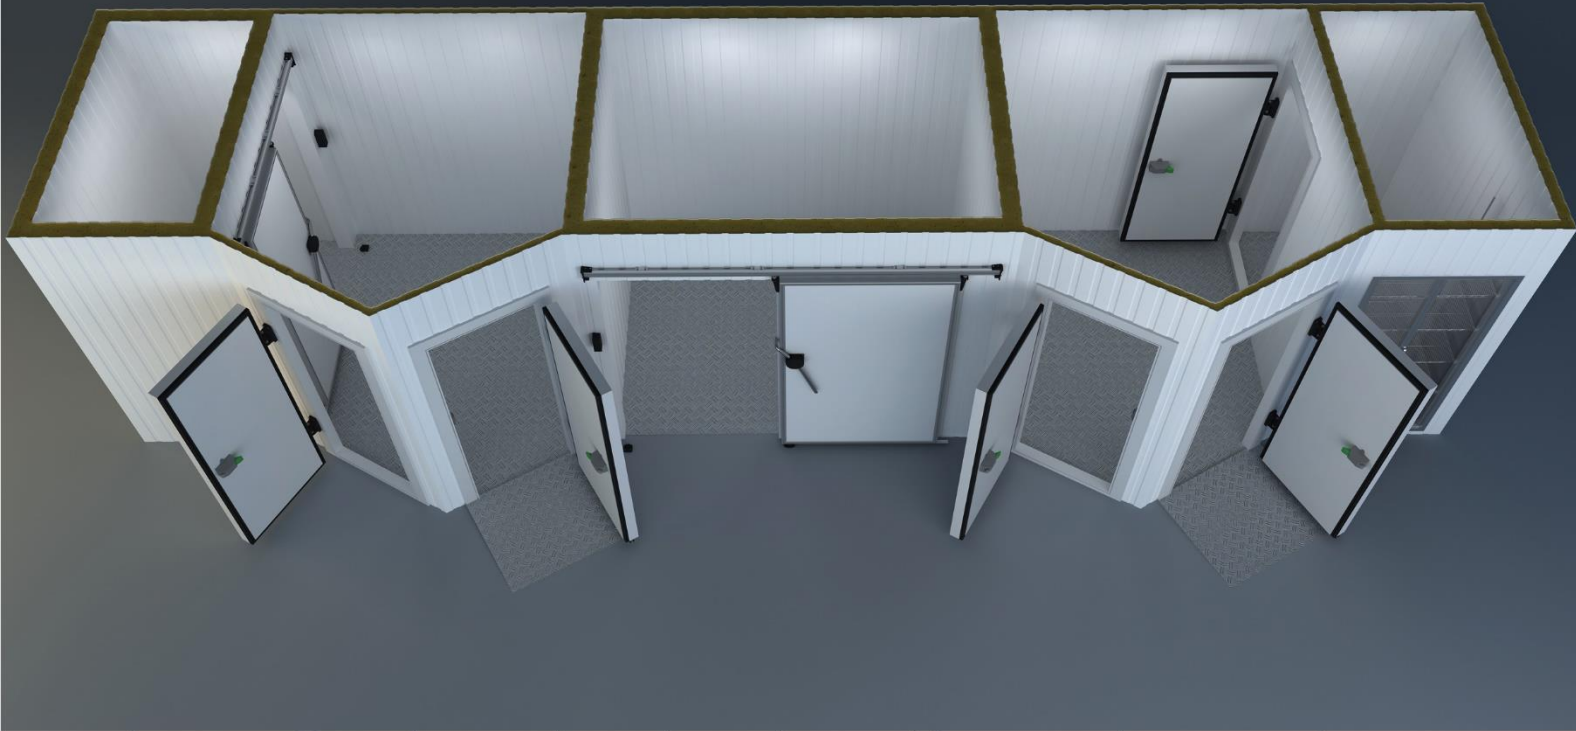

Inova Group :

Since its inception, it has Reached More Than 10,000 Customers Worldwide & We Manufactured Than More 80,000 Doors.








Our Production of Turkey :

Sliding Door With Personal Door , Folding Service Door , Double Wings of Sliding Door & With These Doors We Manufactured Hinged Door , Sliding Door ,FlipFlap Door ,Service Door & Monorail System INOVA GROUP Aims to Keep Customer Satisfaction at Maximum Level With its Quality & Service Import – Export – Production – Marketing - Sales & After - Sales Services Constitute Our Main Activity Structure .

IF YOU GIVE IMPORTANCE TO CUSTOMER YOU WILL BE THE MOST VALUABLE BRAND OF WORLD..

Inova Group Continues to Action With This Mission.

INOVA DOOR AND ACCESSORIES SYSTEMS

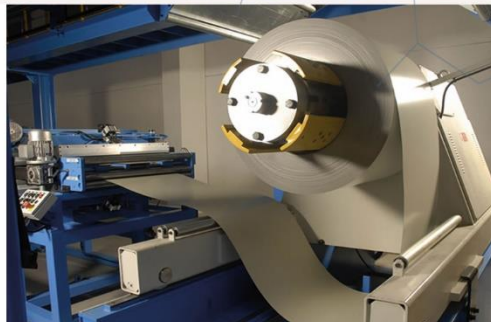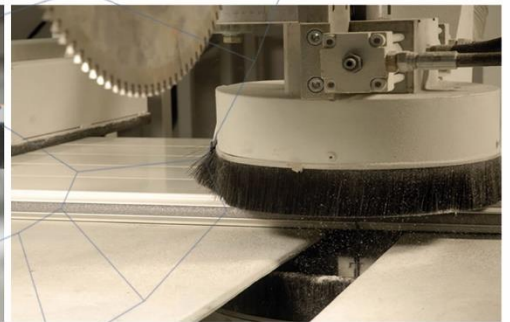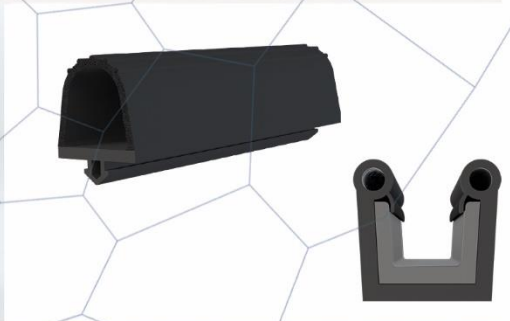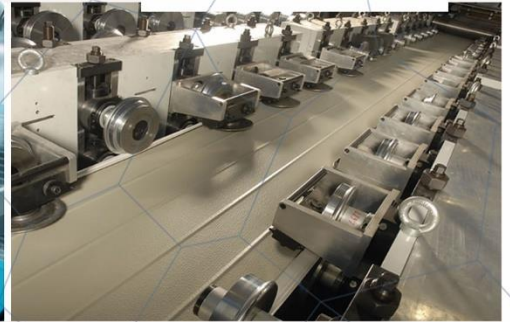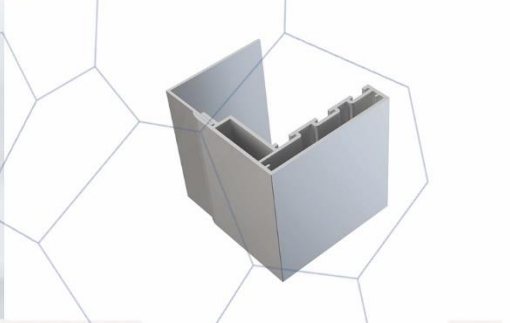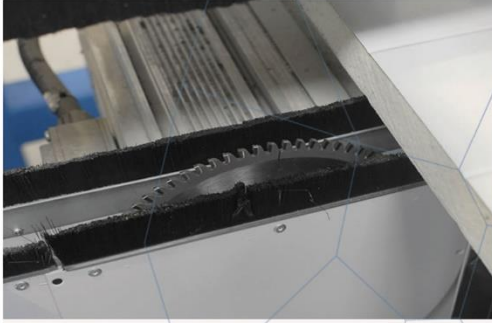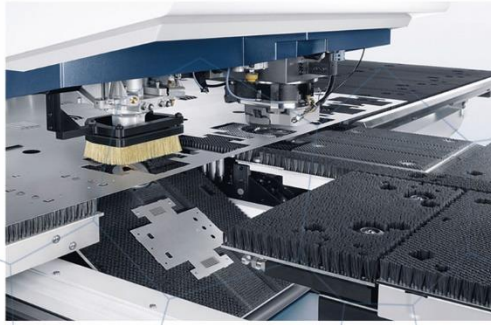

inovarefrigeration
by INOVA YAPI



THE DOORS WITH INSULATING, FILLED WITH POLYURETHANE, ISOTHERMIC - HINGED AND SLIDING DOORS-TWO LEAVES SLIDING DOORS- SLIDING DOORS WITH PERSONAL DOOR MONORAIL TYPE DOORS USAGE AREAS;



- Cold storage
- Cold rooms
- Modular cold plants
- Walk-in freezer rooms
- Vehicles with cold dorse
- Cold product protection rooms
- Shock freezing chambers
- Climating rooms
- Medical materials and waste plants
- The facilities that apply polyurethane
- Factories
- Health and beauty facilities
- Hotels
- Hospitals
- Restaurants
- Chemical laboratories
- Gsm
- Telecominication
- Morgues
- Operation rooms
- Units in which insulation and hygiene are required

ALUMINUM FRAME



Aluminum Case

Aluminum Frame

With Step

COLD ROOM DOOR & ACCESSORIES Hinged Doors



inovarefrigeration
by INOVA YAPI

Usage areas :

Cold storage , Cold rooms ; Product freezing rooms , Shock production chambers , Hotels , Medicine Storage rooms , Medical materials & Waste plants , Air conditioning rooms , Food facilities such as meat , Cheese, Milk Production facilities, Warehouses, Factories, Painthouses, Women's health & beauty centers , Garbage processing plants , Morgues , Frigolu vehicles , Telecommunication base station centers , Hygiene areas , Restaurants Food production facilities, Pastries , Hot rooms , Gsm booths , Integrated production facilities , Pc server rooms, Vegetable & fruit processing plants, Pickles Tomato Paste production facilities , Hospitals , Operating theaters , Fish production & processing plants , Clearing stations , Chemical laboratories .

Doors Special Solutions :

- Doors are easy & fast to mounted & easy to maintain
- The area to be used is produced according to your needs
- Includes special accessories developed according to every need
- It has a system to be installed according to each wall type
- It has the feature of keeping the thermal insulation at maximum level
- We use Package with strength packaging system
- Recessed type doors

Environment and User Friendly :

- Clean design
- Does not contain bacteria
- Corrosion resistant
- High-pressure accessories
- Manufacturing with environmentally friendly products
- Maximum energy saving
- Durable materials
- High vapor proof sealing system
- Quiet and smooth operation

Dimensions of Standard Model Doors :

75 cm width * 180 cm High * 80 mm / 100 mm (Optionally) thickness (wing or blade size)
90 cm width * 190 cm High * 80 mm / 100 mm (Optionally) thickness (wing or blade size)
100 cm width * 200 cm High * 80 mm / 100 mm (Optionally) thickness (wing or blade size)
110 cm width * 190 cm High * 80 mm / 100 mm (Optionally) thickness (wing or blade size)

Minimum and Maximum Door Dimensions :

Minimum : 40 cm Width * 40 cm High * 80 mm / 100 mm (Optionally) thickness (wing / blade size)
Maximum : 2 m Width * 3 m High * 80 mm / 100 mm (Optionally) thickness (wing / blade size)

Maximum door dimensions can be made by considering the international transport standards
Measures can be made in the desired size in the areas to be applied on-site.
The prices vary for models other than standard size.



TECHNICAL SPECIFICATIONS OF DOORS

Room Temperature Range Door To Use : NEGATIVE – 50 °C / POSITIVE 80 °C

Door Type : Hinged door

Door Wing Thickness : 80 mm / 100 mm (Optionally)

Door Wing Sheet Feature : Door sheet are coatings with scratch protection surface with PVC films 100- 200 μ micron / 0,50 mm x 0,70 mm (minimum) Hot dipped galvanized coil coating painted steel 10142

Door Wing Sheet Quality : dx51d + z - EN 10327 - Standards

Door Wing Insulation Features : Polyol + Izocsiyanate = Polyurethane

Insulation Density : 40- 45 kg / m³ - EN 1602 Standards

Thermal Conductivity Coefficient : $\lambda = 0,022$ W/mK - EN 13162

Fire Classification : PUR- B-s1, d0 EN 13501-1 / PIR - B-s1, d0 EN 13501-1 (Optionally)

Door Wing Color Suggested : Standard models Ral 9002 - PVDF (Polyvinylidene Floride) Painted Galvanized Sheet or if you want Different colors option your order should be over 30 pieces .

Door Insulation Gaskets : Double Density Component with Epdm & Pvc Combination. Suitable for use in the thermal temperature range between 65 °C & + 150 °C. As used in food & living areas, it's in compliance with 21.CFR 177.2600 specifications & quality standards. Corner gaskets used by us for the first time in the world do not require welded gaskets .Withstep (threshold) & without step (non threshold) are Provides 100 % sealing on all models.

Door Wing Case : DIN 50049 - 2.2. / EN 10204- 3.1.B Standards. In Anodized aluminum profile.

Door Lock (Handle) : 100 % leak - proof & frost- free door lock that can be locked from the outside . PA 6.6 (Poliamid 6.6) % 30 GF we manufacturing in standards. Dark rooms In order to detect the door lock & facilitate the output, it is marked with phosphorus (bright).

Door Hinges : The door hinges have a system that opens up when the door is opened & a downward system while closing. This system ensures maximum insulation of the door. The hinges can be used in different quantities according to the area to be used & at least 2 according to the door size. It works silently No sagging, No breaking.

Door Front Frame : 100 % German design against DIN 50049- 2.2. / EN 10204 - 3.1.B maximum heat insulation polyamide barrier Aluminum Frame.

Door Rear Frame : 2 types of rear moldings can be applied according to the wall thickness of the door to be mounted. It has 2 models in aluminum & PVC . Since the rear frames do not carry loads, they are applied only for image aesthetics.

Door Opening System : The hinged doors are only opened & closed manually .




Resistance (Heating Cable) : 220 Volt It can be connected directly .It can work within the range of- 70° C to + 200 ° C Maximum degree.(optionally) .


The Viewing Window : Surveillance windows are the window system for viewing the inside & outside . Fiber glass is made of hard & transparent material & Epdm flexible seals. 100% leak-proof (optionally) .

Door Bumper Plate : Aluminum or Pvc Thick absorber materials applied on the inside or outside of the door on the lower parts of the door in frequently used & impacted areas are called bumper. Bumpers are available as optional in cold room doors. In addition to aluminum material or PVC plate absorbers ,stainless steel 304 quality thick sheet application can be made .

Optional door accessories : Over 30 pieces. colors are Available, 304 quality chrome stainless sheet blade, Viewing window,Over 2 pieces of hinge, Bumper plate , PIR Polyurethane, Automatic door closers.



The Viewing Window

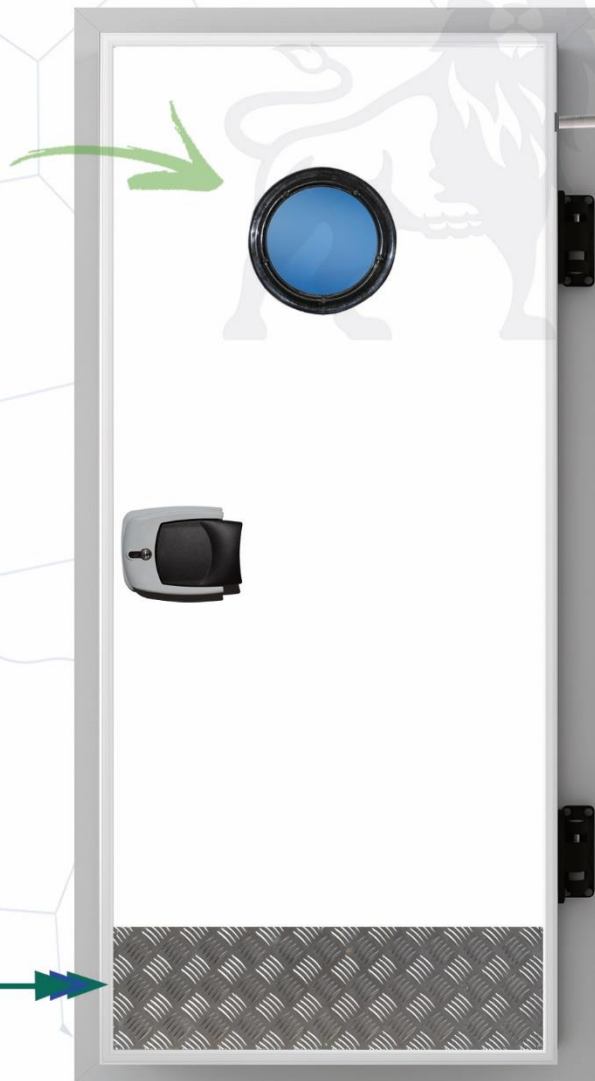

Resistance (Heating Cable)

Door Bumper Plate
stainless steel 304



Door Bumper Plate
PVC



Door Bumper Plate
Aluminum



ALUMINUM FRAME :

Without Step Aluminum Frame

1



Screw



Screw hiding cover

ALUMINUM Frame

2

3


Heat Barrier

Back Frame



Front Frame

Without Step



ALUMINUM FRAME :

With Step Aluminum Frame

1



Screw



Screw hiding cover


ALUMINUM Frame

2

3


Heat Barrier

Back Frame



Front Frame

With Step



4

